

Yamato Large Capacity Laboratory Use Autoclave Sterilizer

Contact Us At: 800-574-2748 323-770-0634

For Information and to Order

Email: sales@LRE.com
Web Site: www.LRE.com



Laboratory Autoclave Sterilizer Models: SQ500C/510C/810C

Operating temp. range 45°C to 135°C

Max. operating pressure 0.255MPa

Internal capacity 50L (SQ500C/510C) / 80L (SQ810C)

High-Performance, Easy Operation and Ergonomically Designed Autoclave Sterilizer Featuring Easy Top Loading and Handling of Samples




- Maximum sterilizing temperature goes up to 135°C suitable for protein modification
- By simple setting and operation, these sterilizers manage ordinary sterilization, sterilization of culture mediums and liquids, and melting of culture mediums
- Custom programs can be saved for repeated use
- Standard equipped with timer start and pre-heating features for efficient use of time and cooling fan to shorten cool down time
- Mobile on wheels
- Enhanced safety device
- Lid interlock mechanism
- Drain bottle unset alarm
- Memory malfunction
- Automatic shutdown when malfunction
- Self-diagnostic functions

Yamato Autoclave Specs:

Contact Us For Discounted Prices

Yamato Autoclave Specs:	Contact 03 For Discounted Frices			
Model	SQ500C	SQ510C	SQ810C	
System	Automatic high-pressure steam sterilization			
Operating temperature range	45~135°C			
Max. working pressure	0.255MPa (36.9 PSI)			
Ambient temperature	5~35°C			
Lid	Manual upward opening with an interlock for safety			
Heater	1000W x 2 units			
Exhaust valve	One exhaust valve and one slow release valve			
Connection ports for optional accessories	Total 3 ports. Female thread for sample temp. sensor (1/4"), Female thread for chamber temp. sensor (1/4"), Female thread pressure sensor (branching from the solenoid valve tubing)			
Cooling fan	Axial fan motor			
Temp. controller	PID control by microprocessor			
Temp. display / setting	Digital display / digital setting by ▲/▼ keys			
Timer / Timer resolution	0 or 1 min. to 99 hrs 59 min. / 1 minute			
Operation mode	Instrument sterilization course, liquid sterilization course, sterilization and keep warm course, melting and keep warm course, customer-programmed course			
Other functions	Key locking, presetting, saving, preheating, forced cooling, sample temperature sensor (option), pattern locking, up to 20 error log saving, display of accumulated working time / present time, ON-OFF beeping setting			
Safety device	Sensor failure detection, SSR short-circuit, broken heater wire, prevention of idle heating (liquid expansion type), alarm against the absence of a drain bottle, failure in locking the lid, memory error detection, pressure relief valve (0.255 MPa)			
External dimensions (WxDxH)	20.4" x 26" x 34.6"		20.4" x 26" x 45.7"	
Internal dimensions of chamber	I.D. 14.5" x 18.5"		I.D. 14.5" x 29.5"	
Internal capacity	50L 80L		80L	
Weight	209 Lbs.		232 Lbs.	
Power source	AC100~120V (24.5~20.5A) no plug, round terminal	AC200~240V (12.5~10.5A) no plug, round terminal	AC200~240V (12.5~10.5A) no plug, round terminal	
Accessories	2 pcs. stainless steel mesh basket (Dia. 13" x D7.7") OSQ-90		3 pcs. stainless steel mesh basket (Dia. 13" x D7.7"), OSQ-90	
	Vapor cup x 1, Drain bottle x 1, Drain board x 1, Chemical indicator 1 set (30 pieces), Filter x 1			

Low Height Sterilizers

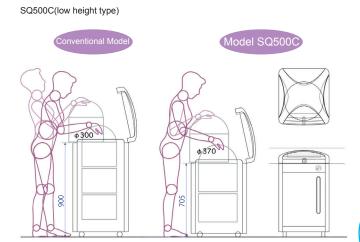

Control panel



Sterilize/Normal Course	Sterilization of equipment such as flask, beaker, test tube, scissors
Sterilize/Liquid Course	Sterilization of culture and reagents and keep warm
Sterilize Warm Course	Dissolve and keep warm of the agar medium
Melt Warm Course	Sterilization of liquid, purified water and dilution water
Manual Course	Customized temperature and time settings

Optional items



Stainless baskets



Stainless buckets

Product code	Model	Description	
241099	OSQ-90	Mesh basket	
241090	OSR-40	Mesh basket with 2 stacking fittings	
241097	OSR-50	Mesh basket with 1 adjustable stainless steel perforated plate	
241098	OSR-60	Stainless solid basket	
241152	OSN14	Stainless bucket	
Please specify when ordering main unit.		Chamber temperature sensor	
		Sample temperature sensor	
		Pressure gauge	
		External alarm output terminal	
		Temperature output terminal	
		Time-up output terminal	

Yamato Autoclave Sterilizer Models SQ500C/510C/810C