

# High Temperature Natural Convection Oven

## Yamato **High Temp** Industrial Oven Model DR200

Operating temp. range 300~700°C

Temp. distribution accuracy  $\pm 25^{\circ}\text{C}$  (at 700°C)

Internal capacity .48 CuFt.

### Wide Temperature Range, Maximum Operation Temperature Up To 700°C

#### Operation and functions

- Programmable natural convection oven with high accuracy control at high temperature range
- Equipped with high operability temperature controller
- Can be used as constant temperature oven, drying oven, and electric furnace for ashing, sintering, etc. as unit is suitable for each of these three functions
- Temperature, measured temperature and overheat prevention temperature can be digitally set by operation menu and  $\blacktriangle/\blacktriangledown$  keys
- Easy programmable operation, fixed temperature, quick auto stop, auto stop and auto start
- Lock function, auto recovery after power failure, calibration offset

#### Safety Features

- Failure of sensor, heater, SSR, memory, internal communication, temperature inputting circuit, automatic overheating prevention device, overheating prevention device, measurement temperature

#### Specifications:

#### Contact Us For Discounted Prices


Yamato Oven Model	Yamato Oven Model DR200
System	Natural convection
Temp. control range	300~700°C
Temp. adjustment accuracy	$\pm 5^{\circ}\text{C}$ (at 700°C)
Temp. control accuracy	$\pm 25^{\circ}\text{C}$ (at 700°C)
Max. temp. reaching time	~70min. (Room temp. +5°C~700°C)
Interior material	Stainless steel
External material	Electro-galvanized steel sheet with epoxy and melamine resin baking finish
Heat insulating material	Ceramic fiber
Heater	Iron-chrome wire heater 1.3kW
Temp. controller	PID control
Temp. setting method	Digital setting by operation menu key and $\blacktriangle/\blacktriangledown$ keys
Temp. display	Measured temp.: Green 4 digit LED digital display Setting temp.: Red 4 digit LED digital display
Timer	1min. to 99hrs 59min. and 100~999hrs 50min. (with timer wait function)
Operation functions	Program operation, fixed temperature, quick auto stop, auto stop, auto start
Additional functions	Calibration off-set, key lock, auto recovery after power failure
Heater circuit control	SSR control
Sensor	K thermocouple (W sensor)
Safety device	Self diagnostic functions (temp. sensor abnormal, heater disconnection, SSR short, automatic overheat prevention function), key lock function, overheat prevention, electric leakage breaker with over current protection
Internal dimension (WxDxH)	9.8" X 9.8" X 8.6"
External dimension* (WxDxH)	20.5" X 17.4" X 24"
Internal capacity	.48 Cubic Ft.
Shelf load capacity	33 Lbs / pc.
Shelf rest step number	3 steps
Shelf rest pitch	1.3"
Power source (50/60Hz)	AC115V, 12A / AC220V, 6.5A (with plug)
Weight	79 Lbs
Shelf plate	Stainless punching metal
Shelf plate	2 pcs. (1 pc. screwed at the bottom)

\* Protrusions not included.




#### Options We Can Provide:

Additional Shelves  
 Custom Stands  
 Ports  
 Recording Devices  
 Please Inquire...

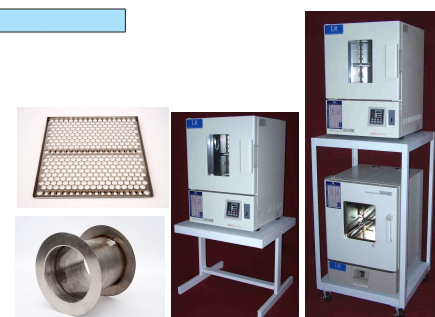


[Side view]



Method

#### Dimensions (mm)



#### Attention

- Never use in flammable or explosive gas atmosphere
- Never use explosive or flammable material
- Caution: High temperature components

Yamato High Temp Oven Model DR200

Visit Our Web Site To View Our Inventory Of NEW Yamato Ovens [www.LRE.com](http://www.LRE.com)

Or Call 323-770-0634 800-574-2748